

SINGLE BED LIGHT STANDARD CARE

calmea

Aesthetics - Redefined





calmea

Aesthetics – Redefined

calmea is a stylish single-bed light specifically designed for use in healthcare settings. It provides flexible lighting that enhances patient comfort and supports the efficiency of healthcare staff. calmea meets the key lighting requirements in hospitals and care facilities, including general lighting, reading light, examination, and night lighting.

With high color rendering and adjustable color temperatures, it not only ensures optimal lighting conditions but also creates an inviting, cozy atmosphere with its sleek, minimalist design. The attractive design and versatile lighting settings promote a pleasant environment for patients. Thanks to various mounting options, calmea can be effortlessly integrated into any room concept.

Key Details

Applications:

Project-specific single-bed light for illuminating patient rooms in hospitals.

Mounting Options:

- » Direct wall mounting
- » Mounting via mounting profile

Accessories:

The integrated accessory groove in the mounting profile offers versatile options for attaching accessories.

Luminous Flux:

Over 17,000 lumens in total With 4 different lighting modes

Color Temperatures:

3000K, 4000K


tunableWhite 2700 - 6500K



STANDARD CARE calmea 2

Fig. 02 | Examination Lighting For examinations and treatments, an additional examination light can be activated alongside the indirect lighting and reading light. STANDARD CARE calmea

Lighting scenarios




General Lighting

Indirect lighting is used to create a cozy and homely atmosphere.




Reading Light

The glare-free reading light ensures the required level of brightness and high uniformity on the reading surface.



Basic Examination Lighting

Reading light and indirect light serve as examination lighting for simple examinations.




Night Lighting

A separate night light provides the necessary illumination for orientation during the night.






Mounting Scenarios – Top View

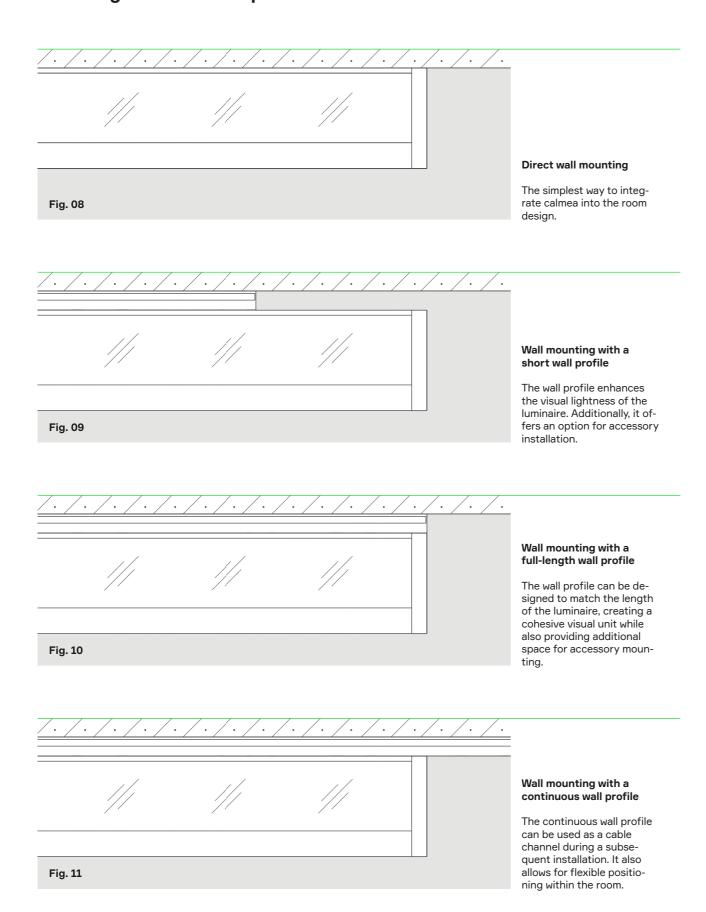

Mounting Scenarios – Side View

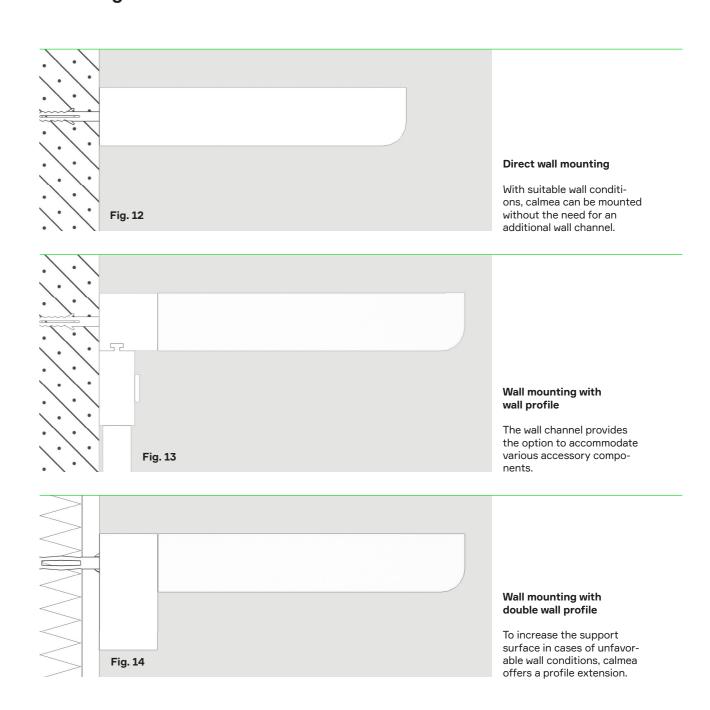

General Information


| Housing Colors | White (RAL 9016), Black (RAL 9005), Silver (RAL 9006) | | | | |
|----------------------|--|--|--|--|--|
| Protection Class | IP20 | | | | |
| Control Options | LPD (PushDim Button Dimming), LDO (DALI), HCL (Human-Centric Lighting with integrated stand-alone controller) | | | | |
| Luminaire Dimensions | Height: 37mm; Depth: 195mm Length: 1500mm, 1320mm, 1220mm, 1080mm | | | | |

Tab. 1



STANDARD CARE calmea 8

Lighting Technical Details

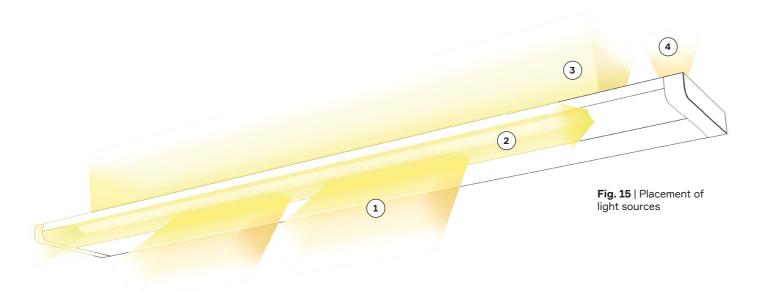

| | Color Temp [k] | Luminous Flux [lm] | Power [W] | CRI | Available Lengths [mm] |
|---------------------------|-------------------|-----------------------|--------------|---------|--------------------------|
| Reading Light | 3000 | 1350 | 14 | CRI >90 | 1000 1000 1700 1500 |
| | 4000 | 1500 | 14 | CRI >90 | — 1080, 1220, 1320, 1500 |
| 3 Indirect Light TW (68W) | 2700-6500 | bis zu 8000 | 68 | CRI >90 | 1500 |
| 3 Indirect Light TW (54W) | | bis zu 6400 | 54 | CRI >90 | 1220 |
| 3 Indirect Light (85W) | 3000 | 10300 | 85 | CRI >90 | 1720 |
| | 4000 | 11500 | 85 | CRI >90 | 1320 |
| 3 Indirect Light (68W) | 3000 | 8300 | 68 | CRI >90 | 1080 |
| | 4000 | 9200 | 68 | CRI >90 | 1080 |
| 2 Examination Light | 3000 | 4000 | 43 | CRI >90 | - 1320, 1500 |
| | 4000 | 4400 | 43 | CRI >90 | |
| Night Light | 3000 | 200 | 3,5 | CRI >90 | 1000 1000 1700 1500 |
| | 4000 | 220 | 3,5 | CRI >90 | — 1080, 1220, 1320, 1500 |

Technical modifications and errors excepted. Illustrations may differ from the original product. Due to component tolerances, photometric and electrical values may vary.

Tab. 2

Installation Options







STANDARD CARE calmea 10



